




1. Pattern Type: CH8x2Line
2. Display Mode: STN/Gray/Positive/Reflective
3. Drive Condition: 1/16 Duty, 1/5 Bias, VDD=5.0V
4. Viewing angle: 6 O'clock
5. Operating temp.: 0°C ~ +50°C,
Storage temp.: -20°C~+70°C
6. Driver I: ALP31066 or EQUiV
7. LCD connector: Metal Pin
8. RoHS Compliant



BACK

1	VSS	6	E
2	VDD	7	DB4
3	VEE	8	DB5
4	RS	9	DB6
5	RW	10	DB7

PIN FUNCTION

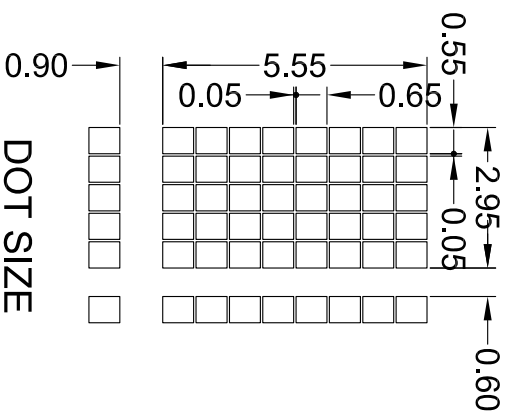

DOT SIZE

Scale 3:1

DESCRIPTION: COUNTER DRAWING	 深圳市金动微显示科技有限公司 Tel: 13420990324 QQ:32569128		
GENERAL TOL: ± 0.3	MODEL No. JDWBC008002SPR-01	Drw: Marcus	Date:
Unit: mm	THIRD ANGLE PROJECTION 	Chk: Gang	Date:
DO NOT SCALE THIS DRAWING.		Apv: Brian	Date: